

Piezo resistive Accelerometer

BST 15C Uniaxial



CONTACT
+49 89 189 41 49-11
info@bay-sensortec.com

FEATURES

- Meets SEA J211 spec
- Very small size and rugged
- Anodized Aluminium Housing
- undamped
- Calibration

APPLICATION

- Crash Test
- Shock Test




DESCRIPTION


The model BST 15C is a uniaxial accelerometer based on piezo resistive technology. This accelerometer meets SAE J211 specifications for instrumentation for impact testing. The fully Wheatstone-Bridge (4 wire system) configuration helps to connect the sensor on all data acquisition systems. The very light weight and small size of the sensor makes it easy to mount it on difficult positions at the car for a crash test or for shock test application.

Due to the anodized aluminium housing and the position of the seismic mass it is possible to use it for crash test. With a 6m, very rugged, shielded and flexible 4-wire cable all common connectors are mountable. As an option, we supply the sensor with a Dallas ID and a Shunt resistor in the connector. A calibration for the sensor is obligatory.

DIMENSIONS

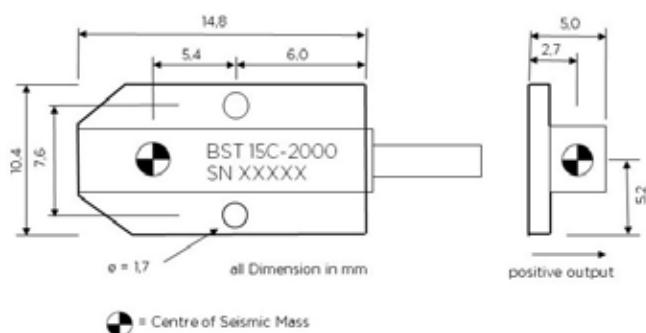

DIAGRAM



SPECIFICATION ACCELEROMETER

All data are typical at 23 °C AND 10 VDC SUPPLY.

Range (g)	500	1,000	2,000
Sensitivity typ. (mV/g)	0.4	0.18	0.016
Frequency response (Hz) 2% max	1,000	1,800	2,000
Frequency response (Hz) 5% max	2,500	3,000	3,500
Resonance Frequency (kHz)	>14	>21	>23
Shock limit (g)	5,000	8,000	8,000

ELECTRICAL PERFORMANCES

Supply voltage	3 to 10 VDC constant
Zero measurement output	+/- 25 mV typ. (Option +/- 10 mV)
Input Bridge Resistance	1,800 to 2,200 Ω
Output Bridge Resistance	1,800 to 2,200 Ω
Isolation	sensing element isolated from housing

ENVIRONMENTAL PERFORMANCES

Thermal Shift Zero	< +/- 0.04 % FSO (0 °C to 50 °C)
Thermal Shift Span	- 0.2 % / °C +/- 0.05 (0 °C to 50 °C)
Operation Temperature	- 20 °C to 70 °C
Storage Temperature	- 50 °C to 100 °C
Protection Class	IP64
Non-Linearity	+/- 1 % of FSO
Transverse sensitivity	2 % typ. (3 % max.)
Damping ratio	0.05 typ.
Housing Material	Aluminium, anodized
Mounting	2 x 0-80, 3/16 length or 2 x M1,6 x 5 mm
Dimensions	14.8 x 5.0 x 5.0 mm (l x w x h)
Weight Housing	1.5 grams without cable
Cable	integrated, 4 wire, shielded PUR, AWG 32
Cable Length	6 m
Cable Material	PUR, black
Cable Weight	6 grams per meter, Ø 2.2 mm

CABLE CODE

red = Excitation +
black = Excitation -

green = Signal +
white = Signal -

ORDER INFORMATION

BST 15C-2000-6Z
15C-B = Model name
2000 = Range 2000 g
6 = 6 m Cable
Z = no connector

OPTIONAL

Additional Cable Length
Connector
Dallas ID
Shunt Resistor
Calibration DAkKS DIN EN ISO/IEC 17025:2018